

Type:			
Model:			

Project:

SPECIFICATION SHEET

MODEL: BB-02 LED

SPECIFICATIONS

HOUSING:

Copper, Oxidized Bronze Finish Available

I FNS

Clear tempered glass convex lens.

LAMP TYPE:

3-watt LED Slugger

MOUNTING:

Threaded base 8". Adjustable shield included

WIRING

Prewired with 5' pigtail of 18/2 cable.

WARRANTY:

Lifetime.







Our "big stick" is used as an uplight where you would use an MR16 or a PAR fixture, but where space is limited. Its slim design allows landscape friendly installations in multiple landscape designs.

Available in custom lengths for placement in high grasses.

DIMENSIONS:

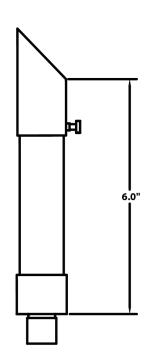

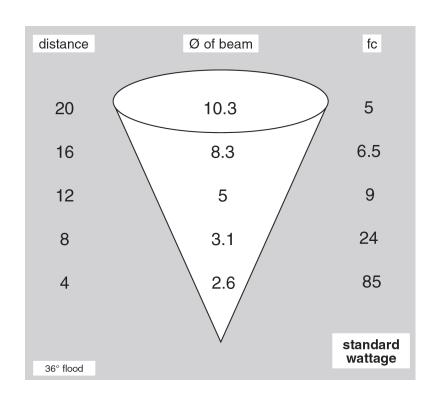



LED LAMP SPECIFICATIONS

OPTICS:

Integral optics providing available beam spreads from 15° to 60°.

COLOR TEMPERATURES:

Color temperature options provide the following qualities: 2700K=ultra-warm; 3000K=warm white; 4000K=neutral white; 5000K=cool white. Decorative color light options include amber, blue, green, and red.





FIXTURE		LAMP			MOUNTING		RISER
BB-02 LED	WATTAGE	BEAM SPREAD	COLOR TEMP.	MS	Composite stake (incl.) 490029	R2	2" brass riser 490038
	2W	25° / 40° / 60°	2700K / 3000K	М3	3-prong tri-stake 490030	R3	3" brass riser 490039
	ZVV	25 / 40 / 60	2700K / 3000K	MY	Y-bracket surface mount 490045	R6	6" brass riser 490031
	4W	25° / 40° / 60°	2700K / 3000K	MG	Brass gutter mount 490047	R12	12" brass riser 490032
				MR	Round 3-hole surface mount 490048	R24	24" brass riser 490033
	5W	15° / 25° / 40° / 60°	2700K / 3000K	MP	PVC mounting stake 490037		
		25°	Amber / Blue / Green / Red				
	6W	25° / 40° / 60°	2700K / 3000K				
	7W	25° / 40°	2700K / 3000K / 4000K / 5000K				
7,00	1 44	60°	2700K / 3000K				